

KYTOLA® OILAN A4 is an online oil water content analyzer which instantly shows changes in the lubrication oil water content. It is an excellent instrument for supporting preventative maintenance.

OILAN A4 detects water leaks in their early stages and helps to prevent expensive failures and down time of the lubricated machinery and equipment.



- Measures the absolute water content in oil (ppm)
- For mineral oils as well as some synthetic oils
- Ranges up to 5 000 or 20 000 ppm
- Accuracy ±30 ppm
- Easy to install by quick connect couplings

ISO 9001:2008 ISO 14001:2004

WATER IN OIL ANALYZER OILAN A4

FEATURES

Online measurement

Serial communication with upper level systems

4-20 mA output

Alarm relay

Monitoring and calibration with Kytola software

TYPICAL APPLICATIONS

Paper machine oil lubrication systems

Ship propulsion systems

Oil rig propulsion systems

Steel mills

Mining

OILAN A4


TECHNICAL DATA


Model	OILAN A4
Maximum range	0—5000 ppm (0—20000 ppm on request)
Accuracy	± 30 ppm within calibrated measuring range and under calibration conditions
Ambient temperature	+5 — +60°C
Oil sample temperature	+5 — +60°C
Oil connection	BSP or NPS 1/4"
Oil purity classification	16/13, ISO 4406
Oil viscosity	10—680 cSt
Oil sample pressure	1—10 bar
Enclosure	Aluminium
Supply voltage	24 VDC
Supply current	1 A max
Current output	4—20 mA
Alarm relay	NO (normally open) or NC (normally closed), selectable using software; max. 48 VDC /100 mA
Communication	Modbus RTU (RS485)
IP Class	IP 65
Weight	4.05 kg including hoses

OILAN-A4-

Oil Connection

BSP 1/4" female adapter NPS 1/4" female adapter

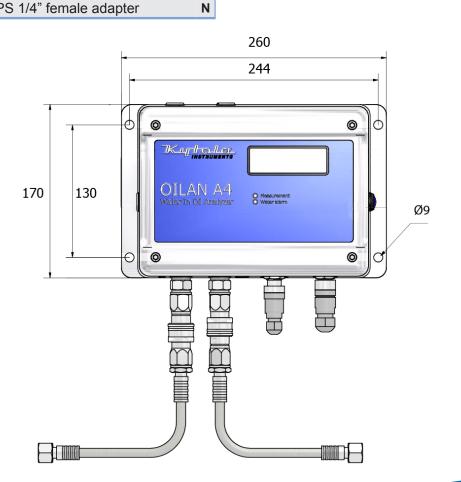

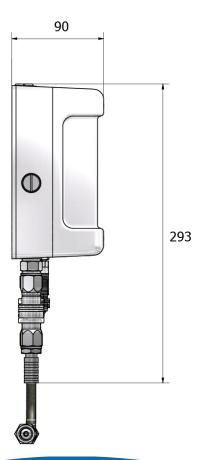



Kytola Instruments Oy Olli Kytölän tie 1 FI-40950 Muurame, Finland Tel. +358 20 779 0690 Fax +358 14 631 419 E-mail info@kytola.com